

T 8015-1 EN

Series 240 · Types 3241-1 PSA, -7 PSA, -9 PSA Pneumatic Control Valves

Type 3241 PSA Globe Valve

DIN version



Application

Control valves for PSA (Pressure Swing Adsorption) plants

Valve sizes	DN 15 to 150
Pressure rating	PN 10 to 40
Medium temperatures	-10 to +220 °C

Special features

Type 3241 Globe Valve operated with

- Type 3271 Pneumatic Actuator (Type 3241-1 Control Valve)
- Type 3277 Pneumatic Actuator (Type 3241-7 Control Valve) for integral positioner attachment
- Type 3275 Pneumatic Piston Actuator (Type 3241-9 Control Valve)

Valve body made of

- Cast steel
- Cast stainless steel or cast cold-resisting steel
- Forged steel
- Forged stainless steel

Undivided valve bonnet

Valve plug

- Soft seal
- High-performance metal seal

Optional with RFID tags with unique identification according to DIN SPEC 91406.

The control valves with their modular design can be equipped with various accessories:


Positioners, solenoid valves and other accessories according to IEC 60534-6-1 ¹⁾ and NAMUR recommendation. Refer to Information Sheet ▶ T 8350 for more details.

Versions

Standard version for medium temperatures from -10 to +220 °C

- **Type 3241-1 PSA** (Fig. 1) · DN 15 to 80 with Type 3271 Actuator (see Data Sheet ▶ T 8310-1)
- **Type 3241-7 PSA** (Fig. 2) · DN 15 to 80 with Type 3277 Actuator (see Data Sheet ▶ T 8310-1)
- **Type 3241-9 PSA** (Fig. 3) · DN 15 to 150, with Type 3275 Piston Actuator (see Data Sheet ▶ T 8314), for integral attachment of a positioner or limit switch

¹⁾ Accessories required. See associated actuator documentation.

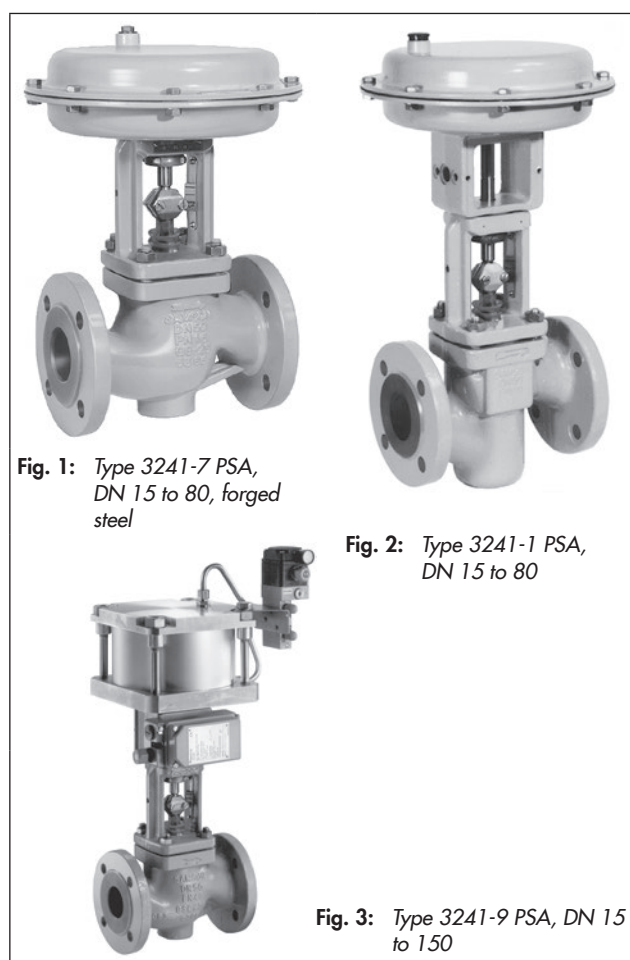

Further versions:

- **Flow divider** · For cast valves for noise reduction in both directions of flow
- **ANSI version** · See Data Sheet u T 8012-1
- **Versions with dimensions according to Japanese Industry Standard (JIS)** · Details on request

Design and principle of operation

The process medium flows through the valve in both directions. The valve plug position determines the cross-sectional area between the seat and plug.

Depending on how the springs are arranged in the Type 3271 or Type 3277 Actuator (▶ T 8310-1), the valve has two different fail-safe positions that become effective when the supply air fails:

- **Actuator stem extends (fail-close)**
The valve closes when the supply air fails.
- **Actuator stem retracts (fail-open)**
The valve opens when the supply air fails.

The double-acting Type 3275 Piston Actuator does not have a fail-safe action (▶ T 8314).

Fig. 4, Fig. 5 and Fig. 6 show configuration examples.

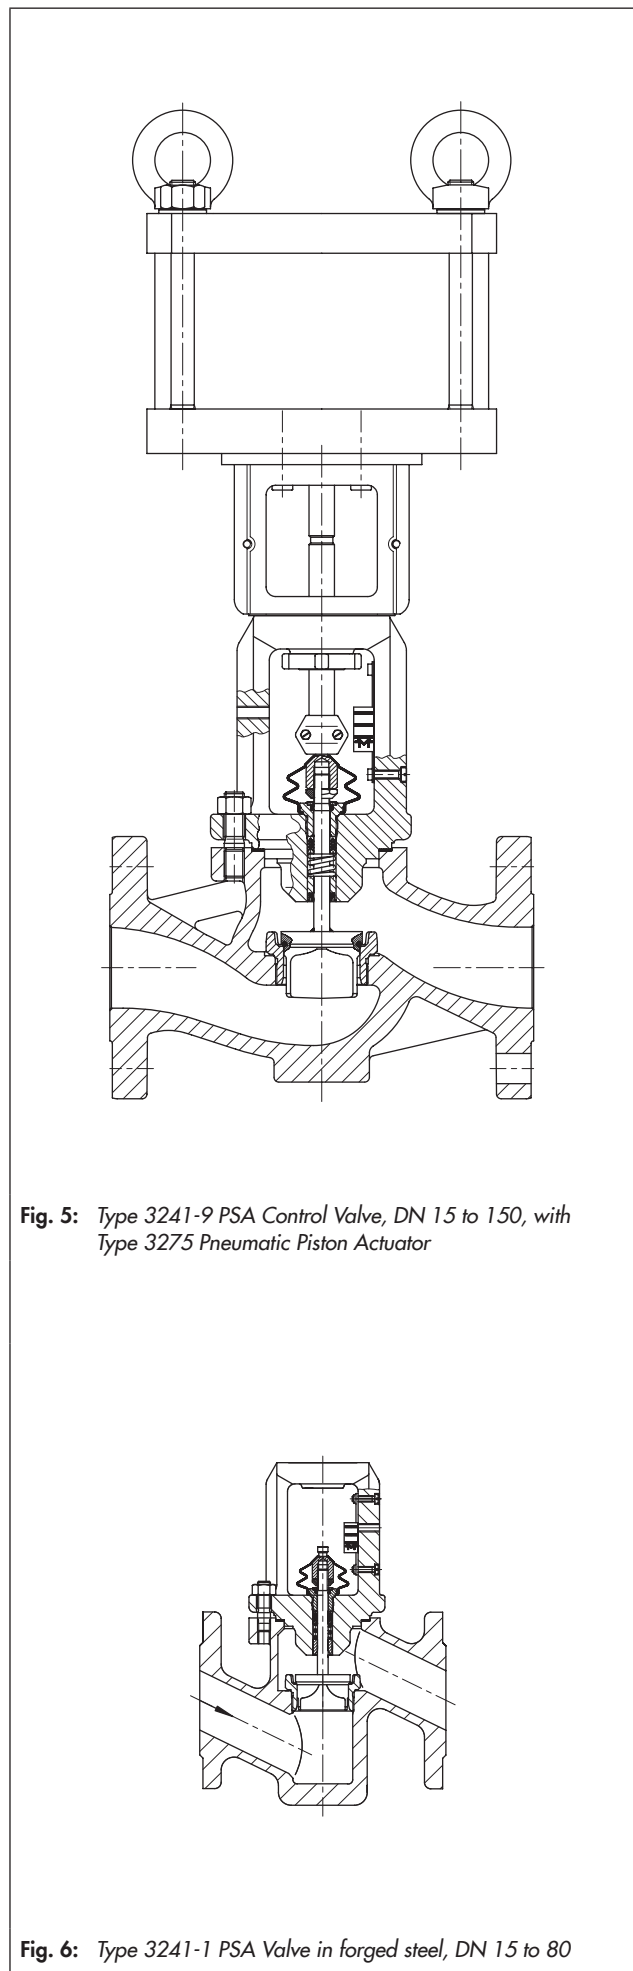
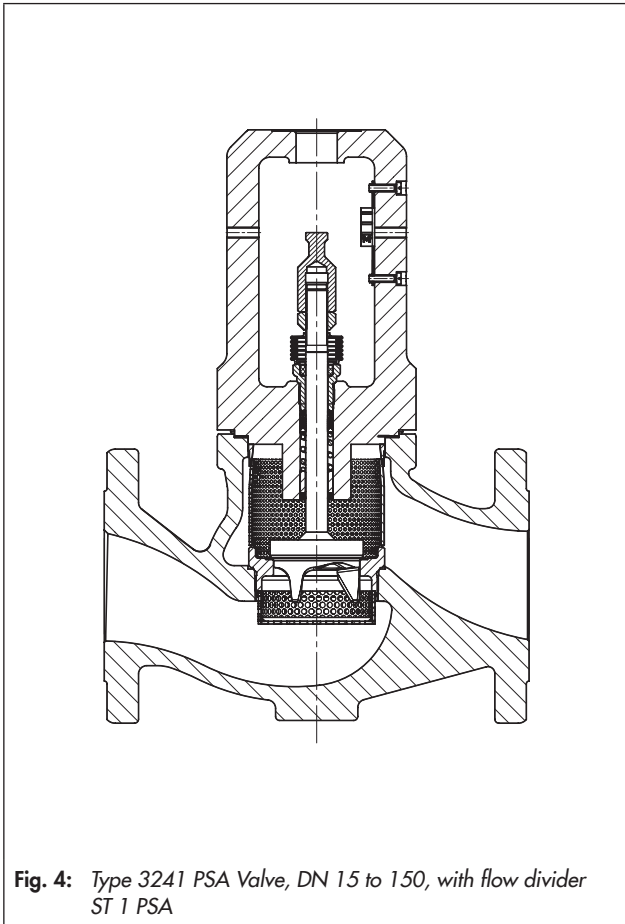


Table 1: Technical data for Type 3241 PSA Valve

Valve size	DN	15...150		15, 25, 40, 50, 80	
Material		Cast steel GP240GH 1.0619	Cast stainless steel 1.4408	Forged steel P250GH 1.0460	Forged stainless steel 1.4571
Type of connection		Flange (all DIN versions)			
Pressure rating PN		10, 16, 25, 40			
Seat-plug seal		Soft seal or high-performance metal seal			
Characteristic		Equal percentage or linear			
Rangeability		50:1 for DN 15 to 50 · 30:1 for DN 65 and larger			
RFID tag (optional)		Application range according to the technical specifications and the explosion protection certificates. Documents ► www.samsongroup.com > Service & Support > Electronic nameplate			
Conformity		CE · EAC			
Medium temperature in °C · Permissible operating pressures acc. to pressure-temperature diagram (see Information Sheet ► T 8000-2)					
Valve		-10 to +220 °C			
RFID tag (optional)		Max. permissible operating temperature: 85 °C			
Leakage class according to IEC 60534-4					
Valve plug	Soft seal	VI			
	High-performance metal seal	V			

Table 2: Materials

Standard version				
Pressure rating	PN 16 to 40			
Valve body ¹⁾	Cast steel GP240GH 1.0619	Cast stainless steel 1.4408	Forged steel P250GH 1.0460	Forged stainless steel 1.4571
Valve bonnet	1.0460	1.4401·1.4404 ²⁾	1.0460	1.4571
Seat and plug	1.4006	1.4404	1.4406	1.4404
	Seal ring for soft-seated plug: PTFE with glass fiber			
Guide bushings	1.4104	1.4404	1.4104	1.4404
Packing	V-ring packing: PTFE with carbon · Spring: 1.4310 · Stem protective ring			
Body gasket	Graphite on metal core			

¹⁾ Special materials on request

²⁾ Material double stamping

Table 3: K_{VS} coefficientsTerms for control valve sizing according to IEC 60534, Parts 2-1 and 2-2: $F_L = 0.95$, $X_T = 0.75$ **Table 3.1:** Overview with flow divider ST 1 PSA (K_{VS1})

K_{VS}	1.6	2.5	4.0	6.3	10	16	25	40	60	80	63	100	160	200	260	
K_{VS1}	1.3	2	3.2	5	8	13	20	32	48	63	50	80	125	160	210	
Seat \varnothing mm	12			24			31	38	48	63	80	63	80	100	110	130
Travel mm	15										30					

Table 3.2: Versions without flow divider

K_{VS}	1.6	2.5	4.0	6.3	10	16	25	40	60	80	63	100	160	200	260	
Valve size DN																
15	•	•	•													
20		•	•	•												
25			•	•	•											
32				•	•	•										
40					•	•	•									
50						•	•	•								
65							•	•	•							
80								•	•	•						
100											•	•	•			
125												•	•	•		
150												•	•			•

Table 3.3: Versions with flow divider ST 1 PSA (K_{VS1}) · Versions with cast bodies only

K_{VS1}	1.3	2	3.2	5	8	13	20	32	48	63	50	80	125	160	210	
Valve size DN																
15	•	•	•													
20	•	•	•													
25	•	•	•													
32				•	•	•										
40					•	•	•									
50						•	•	•								
65							•	•	•							
80								•	•	•						
100										•	•	•				
125												•		•		
150												•	•			•

Notes on the differential pressure tables

The differential pressure tables have been prepared under the following conditions:

- The maximum permissible supply pressure is 4 bar for valves in sizes DN 15 to 50 and actuators with an effective diaphragm area of 700 cm²
- Process medium in flow-to-open direction
- Version with PTFE packing
- The leakage rates specified in Table 1 are not exceeded with the maximum differential pressures specified.
- The specified differential pressure may be restricted by the pressure-temperature diagram.

Table 4: Differential pressure tables for Type 3271 and Type 3277 Actuators with Type 3241 PSA Valve · All pressures in bar

- Permissible differential pressures Δp for unbalanced plug with high-performance metal seal when $p_2 = 0$
- Values specified in the gray-shaded columns correspond to the standard application cases, i.e. operation with rated travel
- Differential pressures specified in the white columns apply to maximum pretensioned springs
- Values in parentheses are valid for 50 % travel.

Table 4.1: Fail-close valve · Valve closed with 0 bar signal pressure

Bench range with actuator		240 cm ²	0.2 to 1.0	0.3 to 1.1	0.4 to 2.0	0.6 to 2.2	0.6 to 3.0	0.9 to 3.3	–	–
		120 cm ²		0.4 to 1.2		0.8 to 2.4		1.2 to 3.6	1.4 to 2.3	2.1 to 3.3
		350 cm ²			(1.2 to 2.0)				(1.8 to 3.0)	
		700 cm ²								
Required supply pressure			1.2	1.4	2.2	2.6	3.2	3.8	2.5	3.5
Valve size DN	K _{VS}	Actuator cm ²	Δp when $p_2 = 0$ bar							
15 to 25	1.6	120	–	–	28	–	–	–	40	–
	2.5	240	28	40	40	40	40	40	–	–
	4.0	350	40	40	40	40	–	–	40	–
20 to 40	6.3 10.0	120	–	–	–	–	–	–	30	40
		240	–	–	14.8	24	24	39	–	–
		350	–	–	24	38	38	40	40	40
		700	–	–	(40)	–	–	–	–	–
32 to 50	16	240	–	–	–	14	14	23	–	–
		350	–	–	13.5	30	22	47	40	40
		700	–	–	(40)	–	(40)	–	–	–
40 to 65	25	350	–	–	–	20	14	31	37	40
		700	–	–	(40)	–	(40)	–	–	–
50 to 80	40	350	–	–	–	12	8.5	19	23	35
		700	–	–	(40)	–	(40)	–	–	–
65 80	60	350	–	–	–	–	4.5	10.5	13	20
		700	–	–	(23)	–	(35)	–	(36)	(40)
80	80	700	–	–	(14)	–	(21)	–	(22)	(33)

Table 4.2: Fail-open valve · Valve closed with the required signal pressure

Bench range with actuator		240 cm ²	0.2 to 1.0							
		120 cm ²	1.2		2.4		4.0			
		350 cm ²								
		700 cm ²								
Required supply pressure			1.2			2.4			4.0	
Valve size DN	K _{VS}	Actuator cm ²	Δp when $p_2 = 0$ bar							
15 to 25	1.6	120	9		40		–		–	
	2.5	240	28		40		–		–	
	4.0	350	40		40		–		–	
20 to 40	6.3 10.0	120	–		31		40		–	
		240	–		–		–		–	
		350	–		40		40		–	
		700	24		40		–		–	
32 to 50	16	240	–		27		40		–	
		350	5.2		40		40		–	
		700	13.5		40		–		–	
40 to 65	25	350	–		37		40		–	
		700	–		40		40		–	
50 to 80	40	350	–		23		40		–	
		700	–		40		40		–	
65 80	60	350	–		13		29		–	
		700	–		27		40		–	
80	80	700	–		16		37		–	

Table 5: Permissible differential pressure for Type 3275 Piston Actuator with Type 3241 PSA Valve

Table 5.1: Plug with high-performance metal seal · Pressures in bar

Valve size DN	Flow coefficient K _{VS}	Actuator cm ²	Supply pressure [bar]							
			1.4	2	2.5	3	3.5	4	5	6
20 to 40	6.3 to 10	314	40	–	–	–	–	–	–	–
32 to 50	16	314	26.5	40	–	–	–	–	–	–
		490	40	–	–	–	–	–	–	–
40...65	25	314	14.4	28.2	39.8	–	–	–	–	–
		490	32.5	40	–	–	–	–	–	–
50 to 65	40	314	6.1	14.8	22.0	29.3	35.5	40	–	–
		490	17.5	31.0	40	–	–	–	–	–
65	60	314	1.0	6.1	10.3	14.5	18.7	22.9	31.3	39.6
		490	7.6	15.5	22.0	28.6	35.1	40	–	–
80	40	314	6.0	14.7	21.9	29.1	36.4	40	–	–
		490	17.3	30.9	40	–	–	–	–	–
80	60	314	1.0	6.0	10.2	14.4	18.6	22.8	31.2	39.6
		490	7.5	15.4	22.0	28.5	35.1	40	–	–
80	80	314	–	1.9	4.5	7.2	9.8	12.4	17.6	22.8
		490	2.9	7.8	11.8	15.9	20.0	24.0	32.2	40
100	63	314	1.0	6.0	10.2	14.4	18.6	22.8	31.2	39.6
		490	7.5	15.4	22.0	28.5	35.1	40	–	–
		804	19.3	32.2	40	–	–	–	–	–
100 125	100	314	–	1.9	4.5	7.2	9.8	12.4	17.6	22.8
		490	2.9	7.8	11.8	15.9	20.0	24.0	32.2	40
		804	10.2	18.2	24.9	31.5	38.2	40	–	–
100 to 150	160	314	–	–	1.6	3.2	4.9	6.6	9.9	13.2
		490	0.5	3.6	6.2	8.8	11.4	14.0	19.2	24.4
		804	5.2	10.3	14.6	18.8	23.1	27.4	35.9	40
125	200	314	–	–	0.8	2.1	3.5	4.9	7.6	10.4
		490	–	–	4.6	6.8	8.9	11.1	15.4	19.6
		804	3.7	8.0	11.5	15.0	18.5	22.1	29.1	36.2
150	260	314	–	–	–	0.7	1.7	2.7	4.7	6.6
		490	–	1.0	2.5	4.1	5.6	7.1	10.2	13.3
		804	1.9	4.9	7.4	10.0	12.5	15.0	20.1	25.1

Table 5.2: *Soft-seated plug · Pressures in bar*

Valve size DN	Flow coefficient K _{vs}	Actuator cm ²	Supply pressure [bar]							
			1.4	2	2.5	3	3.5	4	5	6
20 to 40	6.3 to 10	314	40	–	–	–	–	–	–	–
32 to 50	16	314	40	–	–	–	–	–	–	–
40 to 65	25	314	31.8	40	–	–	–	–	–	–
50 to 65	35	314	19.9	28.6	35.8	40	–	–	–	–
		490	31.2	40	–	–	–	–	–	–
65	60	314	11.4	16.5	20.7	24.9	29.1	33.3	40	–
		490	18.0	25.9	32.4	39.0	40	–	–	–
80	40	314	19.7	28.4	35.6	40	–	–	–	–
		490	31.1	40	–	–	–	–	–	–
80	60	314	11.1	16.5	20.7	24.9	29.1	33.3	40	–
		490	18.0	25.9	32.4	39.0	40	–	–	–
80	80	314	7.1	10.2	12.8	15.4	18.0	20.6	25.8	31.0
		490	11.2	16.0	20.1	24.2	28.2	32.3	40	–
100	63	314	11.4	16.5	20.7	24.9	29.1	33.3	40	–
		490	18.0	25.9	32.4	39.0	40	–	–	–
		804	29.8	40	–	–	–	–	–	–
100 125	100	314	7.1	10.2	12.8	15.4	18.0	20.6	25.8	31.0
		490	11.2	16.0	20.1	24.2	28.2	32.3	40	–
		804	18.4	26.4	33.1	39.8	40	–	–	–
100 to 150	160	314	4.5	6.5	8.2	9.8	11.5	13.2	16.5	19.8
		490	7.1	10.2	12.8	15.4	18.0	20.6	25.8	31.0
		804	11.8	16.9	21.2	25.4	29.7	34.0	40	–
125	200	314	3.7	5.4	6.8	8.1	9.5	10.9	13.6	16.4
		490	5.9	8.5	10.6	12.8	14.9	17.1	21.4	25.6
		804	9.7	14.0	17.5	21.0	24.5	28.1	35.1	40
150	260	314	2.7	3.8	4.8	5.8	6.8	7.8	9.8	11.7
		490	4.2	6.1	7.6	9.1	10.7	12.2	15.3	18.4
		804	7.0	10.0	12.5	15.0	17.6	20.1	25.1	30.2

Table 6: Dimensions for Type 3241-1 PSA, Type 3241-7 PSA and Type 3241-9 PSA in standard version**Table 6.1:** Type 3241 PSA Valve

Valve	DN	15	20	25	32	40	50	65	80	100	125	150	
Length L	mm	130	150	160	180	200	230	290	310	350	400	480	
H1	mm	220						330 ¹⁾	330 ¹⁾	354 ¹⁾	363 ¹⁾	390 ¹⁾	
H2 for version	Cast steel	mm	40			72			98		118	144	175
	Forged steel	mm	53	–	70	–	92	98	–	128	–		

¹⁾ Add 65 mm to H1 when a Type 3275 Actuator with 804 cm² actuator area is mounted.

Table 6.2: Types 3271 and 3277 Pneumatic Actuators

Actuator area	cm ²	120	350	700
Diaphragm ØD	mm	168	280	390
H ¹⁾	mm	69	82	199
H3 ²⁾	mm	110	110	190
H5	Type 3277 mm	88	101	101
Thread	Type 3271	M30x1.5		
	Type 3277	M30x1.5		
α	Type 3271	G 1/8 (1/8 NPT)	G 3/8 (3/8 NPT)	G 3/8 (3/8 NPT)
α2	Type 3277	–	G 3/8	G 3/8

¹⁾ Height with welded-on lifting eyelet or height of eyebolt according to DIN 580. Height of the swivel hoist may differ. Actuators up to 350 cm² without lifting eyelet

²⁾ Minimum clearance required to remove the actuator

Table 6.3: Type 3275 Piston Actuator

Actuator area	cm ²	314	490	804
Diaphragm □D	mm	220	280	350
H	mm	225 ¹⁾	250 ¹⁾	286
H3 ²⁾	mm	110		190
H5	mm	101		–
Thread		M30x1.5		M60x1.5

¹⁾ Different dimensions may arise with the special version (e.g. for low temperatures)

²⁾ Minimum clearance required to remove the actuator


Table 7: Weights for Type 3241-1 PSA, Type 3241-7 PSA and Type 3241-9 PSA**Table 7.1:** Type 3241 PSA Valve

Valve	DN	15	20	25	32	40	50	65	80	100	125	150
Weight without actuator	kg	5	6	7	11	12	15	24	30	42	80	120

Table 7.2: Type 3271, Type 3277 and Type 3275 Actuators

Actuator		Type 3271			Type 3277			Type 3275		
Actuator area	cm ²	120	350	700	120	350	700	314	490	804
Weight, approx.	kg	3	8	22	3.5	12	26	10	17	21

Dimensional drawings

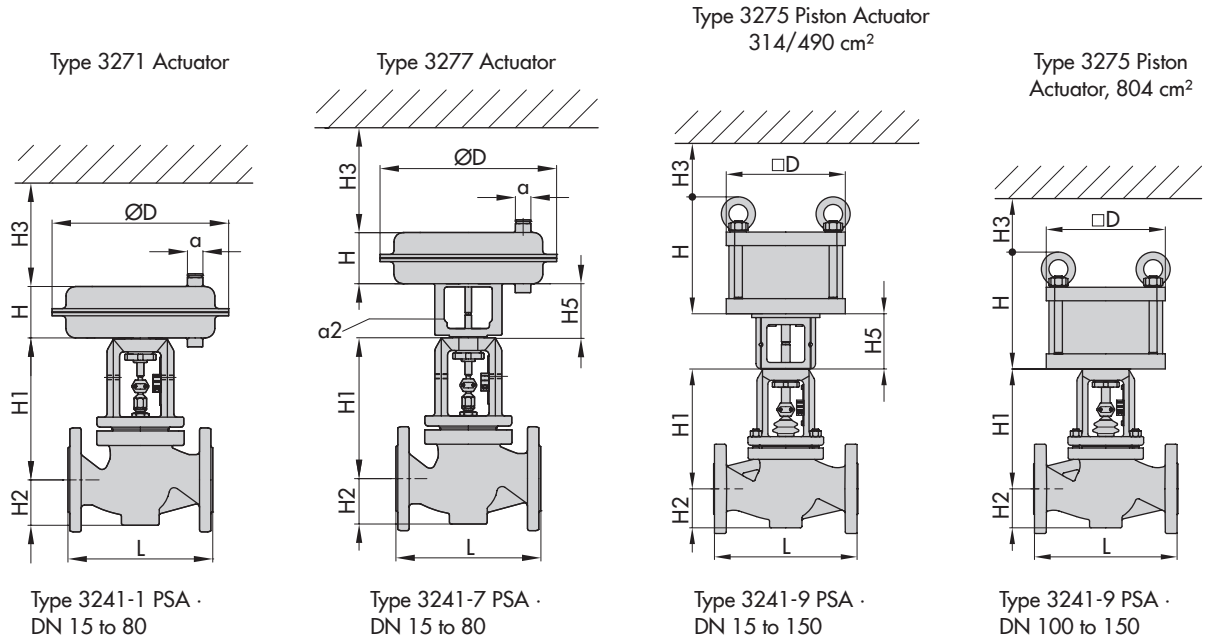

Ordering text

Globe valve	Type 3241 PSA
Valve size	DN ...
Pressure rating	PN ...
Body material	Refer to Table 2
Type of connection	Flanges
Seat-plug seal	Soft seal or high-performance metal seal
Characteristic	Equal percentage or linear
Actuator	Type 3271, Type 3277 or Type 3275
Fail-safe position	Fail-close or fail-open
Process medium	Density in kg/m ³ and temperature in °C
Flow rate	in kg/h or m ³ /h in standard or operating state
Pressure	p ₁ and p ₂ in bar (absolute pressure p _{abs}), with minimum, normal and maximum flow rate
RFID tag	Yes/No
Valve accessories	Positioner and/or limit switch

Associated Data Sheets for

Pneumatic actuators:

Types 3271 and 3277

▶ T 8310-1

Type 3275

▶ T 8314

Associated Mounting and Operating Instructions

▶ EB 8015