

Effective and Long-lasting Sealing Performance

SAMSON

NEW: LoE packing (low emissions)

The maintenance-free packing is especially suitable for Type 3241 and Type 3244 Valves that must have an effective sealing performance over the entire temperature range.




SMART IN FLOW CONTROL

Effective and Long-lasting Sealing Performance

SAMSON

LoE packing (low emissions)

- Institute-independent certification according to ISO 15848-1:2017
- Complies with the latest 2021 TA Luft requirements
- Certified medium temperature range: -50 to $+220$ °C
- Suitable for ambient temperatures as low as -50 °C
- Suitable for use with gases and liquids

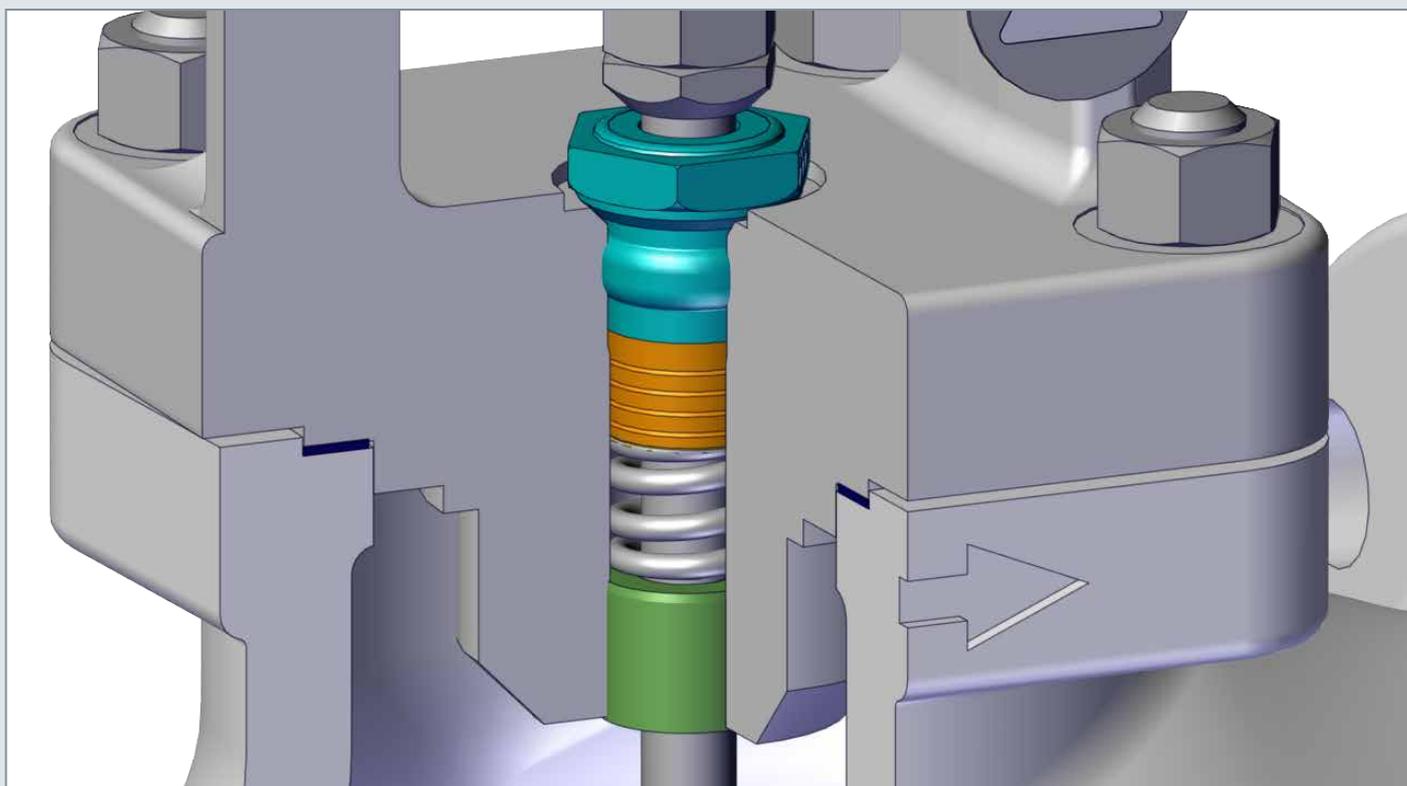

SAMSON AKTIENGESELLSCHAFT

Weismuellerstrasse 3 · 60314 Frankfurt am Main, Germany
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
E-mail: samson@samsongroup.com
Internet: www.samsongroup.com

SMART IN FLOW CONTROL